

CS306: Introduction to Perl

References

U. of Alabama at Birmingham
Dept. of Computer & Information Sciences

Slide 1

A Quick Note About my

For clarity during lecture, I may omit the `my` keyword before variable declarations.

However, in your programs you should always use `my` and avoid global variables.

Slide 3

Section 10: References

Introduction

Creating References
Dereferencing
Complex Data Structures

Slide 2

The Problem We Want To Solve

- Suppose you have:

```
@joe = (43, 'brown', 180);  
@sally = (31, 'blue', 150);  
@vitals = ('joe', 'sally');
```
- Given only the string “joe”, we want to change the contents of `@joe` to set Joe's eyes from brown to hazel.

Slide 4

The Indirection Problem

- When you have a value (the string “joe”) and this value is the name of another variable whose contents you want to access, you need to perform *indirection*
- Various languages solve the indirection problem differently. For instance, C uses pointers and & (get address) and * (get data at address).
- Perl uses *references*


Slide 5

Two Types of Indirection

- You have a string “joe” that just happens to be the name of another variable. Perl calls this a *symbolic reference*. You can think of this as a “fake” reference.
- You have a variable that is storing a direct reference (memory address) to another variable. Perl calls this a *hard reference*. This is what we usually mean when we talk about references.

Slide 6


Two Types of References

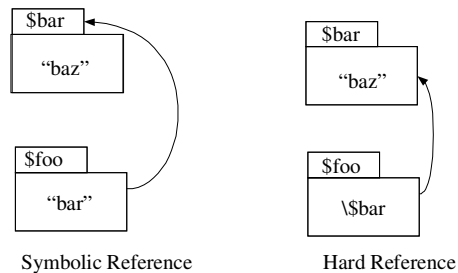

Slide 7

A Perl Secret


All Perl variables are really just hard references...

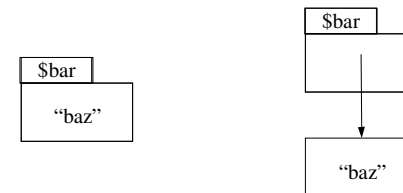

This... ..can be thought of asthis.

Slide 8

A Perl Secret, Continued

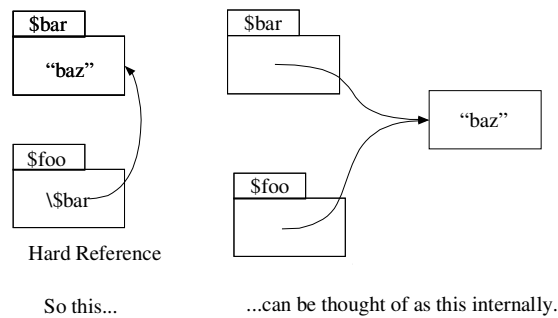

Slide 9


A Perl Secret, Continued

- But, when you explicitly name a variable, you can't use it like a reference. So:


```
$foo = "baz"; # Can't use $foo as a reference
$bar = \$foo; # $bar is a true hard reference
```
- However, internally to Perl, there are two things (\$foo and \$bar) that refer to the string "baz". This is important for garbage collection - Perl only cleans up memory when nothing is referring to it any more.

Slide 10

References and Referents

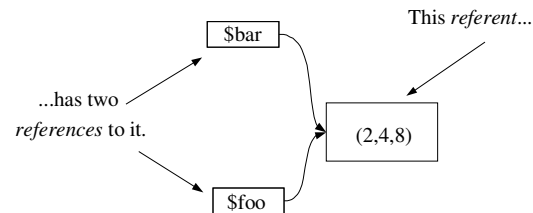

Note that **references themselves are always scalars**, even if the referent is something other than a scalar. This turns out to be hugely important. More on that later.

Slide 11

Creating References

- Perl provides the `\` operator to create references.


```
$bar = $foo; # Reference to a scalar
$bar = @ARGV; # Reference to an array
$bar = \%hash; # A hashref
$bar = \&foobar; # A coderef to a subroutine
$bar = \412.63; # Ref to a constant
```

Slide 12

Anonymous Data

- In most of the examples on the previous slide, we referred to data that was already stored in another variable.
- However, `$bar = \412.63` created a reference to a piece of data that was not named by any variable. This is called *anonymous data*, because it doesn't have a name and is only reachable through the reference that refers to it.

Slide 13

Anonymous Data Continued

- You can create anonymous data of arrays, hashes, etc... as well. Perl provides special syntax for this...
- ```
@array = (1,2,3);
$arrayref = \@array;

compare the above to this...

$arrayref = [1,2,3]; # Now we have anon data
```
- The `[ ]` returns a reference, which is a scalar

Slide 14

## Anonymous Arrays

- Use the `[ ]` instead of `()` to create anonymous arrays instead of named ones.
- ```
my $arrayref = [1, 2, 3];
```
- Remember how arrays can only store scalars?
- ```
my $arrayref = [1, 2, ['a', 'b', 'c'], 3];
```
- Hrrmmm. What did we just do there? How many elements does that anonymous array have?

Slide 15

## References are Scalars

- A reference is the third of the three kinds of scalar data types (along with strings and numbers).
- Thus, you can use a reference any place and manner in which you would use any other scalar
- This means that references can be array elements and hash values. If they happen to refer to other arrays - VOILA, multidimensional data!

Slide 16


## References Allow Complex Data

- So, through the use of references you can create:
  - Arrays of Arrays
  - Hashes of Hashes
  - Arrays of Hashes
  - Hashes of Arrays
  - Arrays of Arrays of Arrays
  - etc....

Slide 17

## A Multidimensional Array

```
• $vitals = [
 ['joe', 43, 'brown', 180],
 ['sally', 31, 'blue', 150],
];
```

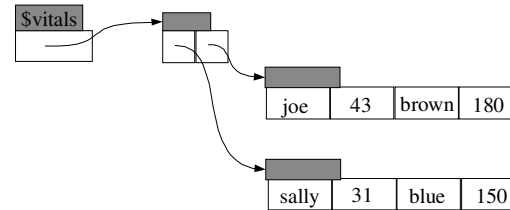

Slide 18

## Anonymous Hashes

- Use the { } to construct anonymous hashes
- \$hashref = { 'Mickey' => 'Donald',  
 'Winnie' => 'Tigger',  
 'Grinch' => anyfriends('grinch'),  
 'Kyle' => ['Kenny', 'Cartman'],  
};

Slide 19

## Anonymous Hashes, Continued

```
$vitals = {"joe" => { age => 41,
 eyes => 'brown',
 weight => 180,
},
 "sally" => { age => 30,
 eyes => 'blue',
 weight => 150,
},
};
```

Slide 20

## Rethinking Perl Variables

- We need to start thinking about Perl variables a little differently now.
- When you see \$foo, think of it as “the scalar value of foo”. There is an entry in memory called “foo”. The \$ says you want to look at the scalar value of it. “foo” as a name is independent of the data within.

Slide 21

## Rethinking Perl Variables

- So, if \$foo happens to be a reference (“the scalar value of foo is a reference”), you can look at what it references by prepending the appropriate character to it.
- \$\$foo is “the scalar value that is referred to by the scalar value of foo.” If \$foo is a reference to a scalar, \$\$foo is that scalar (referent) to which we are referring.

Slide 22

## Dereferencing

- This process is called *dereferencing*. \$\$foo can be read as “dereferencing \$foo”.
- \$\$foo assumes that we know:
  - \$foo is a reference
  - The thing \$foo refers to is a scalar

Slide 23

## Dereferencing Examples

- ```
$car = 'Honda';  
$carref = \ $car;  
$vehicle = $$carref;
```
- ```
$arrayref = ['do','re','mi'];
push @$arrayref, 'fa';
```
- ```
$hashref = {mfgr => 'Dell', model => 'X200'};  
@sorted = sort keys %$hashref;  
print "Model is $$hashref{model}\n";
```

Slide 24

The Second Way to Dereference

- Use a { } block

```
my $aref = [1,2,3];
my @sorted = sort @{$aref}; # {} are optional

# constructing hash of anon sub references
# sub {...}; returns a ref to an anon subroutine
# don't confuse it with sub NAME { ... }
my $hash= ( sayhi => sub {"hello"}; ,
           saybye => sub {"bye"}; ,
           );
print &{ $hash{sayhi} }; # {} not optional here!
# &$hash{sayhi} Perl treats $hash as the ref
```

Slide 25

The Third Way to Dereference

- Use the -> operator for arrays, hashes and subroutines
- my \$aref = ['red', 'yellow', 'blue'];
print "The sky is \$aref->[2]\n";
- my \$hashref = { sender => 'Fran Fabrizio',
 subject => 'HW hints', };
\$hashref->{subject} = 'More HW hints';

Slide 26

Dereferencing Comparison

```
• my $aref = ['perl', 'java', 'c'];
  $$aref[2] = 'c++';           # Method 1
  ${$aref}[2] = 'c++';        # Method 2
  $aref->[2] = 'c++';          # Method 3

• my $href = {apple => 'green', cherry => 'red'};
  print "$$href{apple}\n";    # Method 1
  print "${$href}{apple}\n";  # Method 2
  print "$href->{apple}\n";    # Method 3

• my $cref = sub {return "Hello $_\n"};
  print &$cref('Fran');      # Method 1
  print &{$cref}('Fran');     # Method 2
  print $cref->('Fran');     # Method 3
```

Slide 27

Examining References

```
• my $ref = [1,2,3];
  print $ref;                 # yields "ARRAY(0x804dc28)"
  $ref = {foo => 'bar'};
  print $ref;                 # yields "HASH(0x826d2a4)"

• You can also check if a scalar is a reference, and
  what type it is, through the ref() function

• if (ref($r) eq "HASH") {
    print "r is a reference to a hash.\n";
  }

• unless (ref($r)) {
  print "r is not a reference at all.\n";
  }
```

Slide 28

Arrays of Arrays

- ```
my @tictactoe = (['-','-','x'],
 ['-','x','O'],
 ['o','o','-']);
```

- To access an element of the 2d array, you say:

```
print $tictactoe[1]->[2]; # prints '-'
print $tictactoe[1][2]; # valid shortcut
```

Slide 29

## Array of Arrays, Continued

- Building one dynamically:

```
while (my $line = <>) {
 my @arr = split / /, $line;
 push @AoA, [@arr];
}
```

- Shorter, same thing:

```
while (my $line = <>) {
 push @AoA, [split / /, $line];
}
```

Slide 30

## Sidetrack: Autovivifying References

- *Autovivification* - Bringing to life automatically.
- When you try to assign through an undefined reference, Perl will bring it to life for you

```
while (my $line = <>) {
 push @$AoAref, [split / /, $line];
}
```

- Since `$AoAref` doesn't exist but is required in order to push onto this array, Perl creates it.

Slide 31

## Autovivification, Continued

- Notice the behavior of this program

```
#!/usr/bin/perl
@arr doesn't exist before this line
$arr[4][23][15][24] = 'hi';
print $arr[4][23][15][24]; # 'hi'
print $arr[4][23][15]; # ARRAY(0x804db44)
print $arr[4][23]; # ARRAY(0x804de74)
print $arr[4]; # ARRAY(0x804dd6c)
```

Slide 32

## Back to Arrays of Arrays

- ```
my @tictactoe = ( ['-','-', 'x'],  
                 ['-','x', '-'],  
                 ['o','o', '-'] );
```
- How would we iterate over this?
- ```
for $i (0..$#tictactoe) {
 for $j (0..${tictactoe[$i]}) {
 print "Element $i $j is $tictactoe[$i][$j]\n";
 }
}
```

Slide 33

## Reference to an Array of Arrays

- ```
my $tttref = [ ['-','-', 'x'],  
              ['-','x', '-'],  
              ['o','o', '-'] ];
```

```
print $tttref->[1]->[2]; # prints '-'  
print $tttref->[1][2];  # valid shortcut  
print $tttref[1][2];   # BROKEN
```
- What does the broken line try to do?

Slide 34

Deeper into the Perl Mind Meld

- ```
for $i (1..10) {
 @array = somefunc();
 $AoA[$i] = @array; #WRONG
}
```
- Who can tell me why this is broken?

Slide 35

## Deeper into the Perl Mind Meld

- ```
for $i (1..10) {  
    @array = somefunc();  
    $AoA[$i] = @array; #WRONG  
}
```
- Because you are assigning an array in scalar context, so `$AoA[$i]` is going to get the length of `@array` on each pass. You need to create references.

Slide 36

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 @array = somefunc();
 \$AoA[\$i] = \@array; #STILL WRONG
}

- Who can tell me why this is broken?

Slide 37

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 @array = somefunc();
 \$AoA[\$i] = \@array; #STILL WRONG
}

- @array is the same place in memory each time through the loop, so you keep grabbing a reference to the same place. Each element of \$AoA will reference the same (last) array. Slide 38

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 @array = somefunc();
 \$AoA[\$i] = [@array]; #Right
}

- The [] create a new anonymous array into which the elements of @array are copied. We then store a reference to the anon array.

Slide 39

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 my @array = somefunc();
 \$AoA[\$i] = \@array; #Also Right
}

- Now the lexically-scoped @array is created anew each time through the loop. (Who knows why?)

Slide 40

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 my @array = somefunc();
 \$AoA[\$i] = \@array; #Also Right
}
- Because you avoid the implicit copy that's happening with the []

Slide 41

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 \$AoA[\$i] = [somefunc()]; #Also Right
}
- Even better than the last slide. Why?

Slide 42

Deeper into the Perl Mind Meld

- for \$i (1..10) {
 \$AoA[\$i] = [somefunc()]; #Also Right
}
- We've eliminated the temporary variable @array now. Now we're implicitly copying again, sure, but before we were explicitly doing a copy with the my @array = somefunc() anyhow.

Slide 43

Hash of Arrays

- %HoA = (sciences => ['cs','bio','chem'],
 arts => ['music','art','theater'],
);

\$HoA{engineering} = ['civil','chemical','elec'];

push @{\$HoA{sciences}}, "physics";

print data
for \$school (keys %HoA) {
 print "\$school: @{\$HoA{\$school}}\n";
}
could also add inner loop to get indiv.
elements of the arrays

Slide 44

Array of Hashes

```
• @AoH = ( { mfgr => 'honda',  
            model => 'civic',  
            color => 'blue',  
          },  
          { mfgr => 'toyota',  
            model => 'camry',  
            color => 'black',  
          },  
          { mfgr => 'ford',  
            model => 'F150',  
            color => 'red',  
          },  
        );
```

Slide 45

Array of Hashes, Continued

```
• for $href (@AoH) {  
    for $feature (keys %$href) {  
        print "The $feature is $href->{$feature}\n";  
    }  
    print "\n";  
}
```

Slide 46

Hash of Hashes

```
• The most flexible compound data structure  
%tvfams = ( kingofqueens => {  
            husband => "doug",  
            wife    => "carrie",  
          },  
          seinfeld => {  
            mainchar => "jerry",  
            neighbor => "kramer",  
            baddancer => "elaine",  
            baldguy  => "george",  
          },  
        );
```

Slide 47

Hash of Hashes, Continued

```
• $HoH{seinfeld}{mailman} = 'newman';  
  
# print everything  
for $family (keys %HoH) {  
    print "$family: ";  
    for $role (keys %{$HoH{$family}}) {  
        print "$HoH{$family}{$role} ($role) ";  
    }  
    print "\n";  
}
```

Slide 48

Hash of Hashes, Continued

```
• # largest family first
# use keys() in scalar context, use length of
# array turned by keys()
for $family
  (sort {keys %{$HoH{$a}} <=> keys %{$HoH{$b}}
        keys %HoH} {
    print "$family: ";
    for $role (keys %{$HoH{$family}}) {
      print "$HoH{$family}{$role} ($role) ";
    }
    print "\n";
  }
```

Slide 49

References Wrapup

- References enable complex data structures
- Be extra careful with references. Very easy to try to use a reference like an array/hash by accident, or vice versa. Will often get silent failures.
- Get used to reading Data::Dumper output - if you see [] or { } it's a reference, () it's an array or hash.
- The End. Questions?

Slide 50